



87 Series Electric High Cycle - Maintenance Free Ball Valves

2 Otter Court, Raymond, New Hampshire 03077 • Tel. (603) 895-4761 • FAX (603) 895-6785 • www.geminivalve.com



Made In USA

FEATURES

- Fast 1.3 Second Index Time
- Ultra Compact Design
- 24VDC & 12VDC Motors
- Long-Lasting, Maintenance Free Stem Seal
- Superior Mounting System - Precise Alignment, Rigid Coupling; In-Line or Cross-Mount
- Bubble Tight Closure - Each valve is bubble tested to ensure that all sealing points function properly
- Ideal for wide variety of OEM and End User Applications where traditional slow or bulky actuators will not work

Gemini 87 Series features the latest innovation in a premium quality, long lasting, and truly maintenance free automated valve. Suited for a variety of applications including those involving high cycling where stem seal leakage is problematic or where extended maintenance-free service is desired.

The 87 Series was designed exclusively for enduring automation rather than being simply a

manual ball valve fitted with an actuator. New breakthroughs in stem seal design and a superior mounting system, coupled with competitive pricing, delivers unprecedented value for your automated ball valve needs.

The valve is available in pipe sizes 1/4" - 1" with standard body materials of brass and stainless steel. Each valve is bubble-tested to ensure leak-tight performance.


The valve is operated by a compact direct mount, permanently lubricated worm drive transmission powered by a 12VDC or 24VDC gear motor. The bearing supported drive train ensures long, reliable performance. Each actuator is factory calibrated for fast, accurate and repeatable indexing.

Standard 'In-line' or 'Cross Mount' valve to actuator configuration is easily achieved even after the valve is in service.

Stem Detail

The addition of two o-ring seals adds a new dimension to our proven self compensating stem seal design. Stem seal integrity is achieved by three independent and distinct elements for excellent longevity.

A lower, dual purpose stem seal and thrustbearing made from reinforced Teflon® acts as a primary static seal. A center o-ring seal provides the main dynamic seal. The gland for this o-ring is located on the stem so that it maintains a predictable preload. Finally, an external o-ring provides both a secondary static and dynamic seal. This final seal is spring compensated to make up for extreme cycling and wear. As the o-ring and PTFE seals wear, the springs apply a constant axial force on a hardened stainless washer forcing the o-ring below to

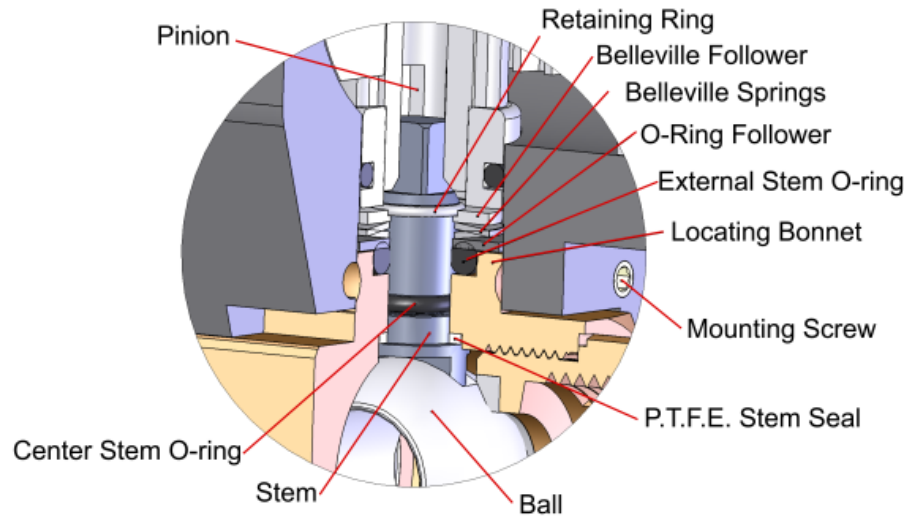

expand radially and maintain contact with the stem.


The traditional stem (packing) nut has been eliminated and replaced with a captive, fixed-preload retaining ring. This eliminates the danger of incorrectly tightening

the nut which can result in premature stem seal leaks. The valve is designed to maintain its integrity without any adjustment or maintenance of the stem seal preload.

Mounting Detail

A key element in long stem seal life is to minimize stem side loading resulting from valve to actuator mis-alignment. Our unique valve to actuator coupling system utilizes a precisely machined locating bonnet and mating actuator gland to ensure nearly perfect alignment. Two intersecting clamp screws are used to complete the mounting process by pulling the valve into the actuator and locking it rigidly in place. These clamp screws are easy accessible making the usual chore of joining or separating the valve from the actuator simple and quick.

Additionally, the relative torque between the actuator and valve is

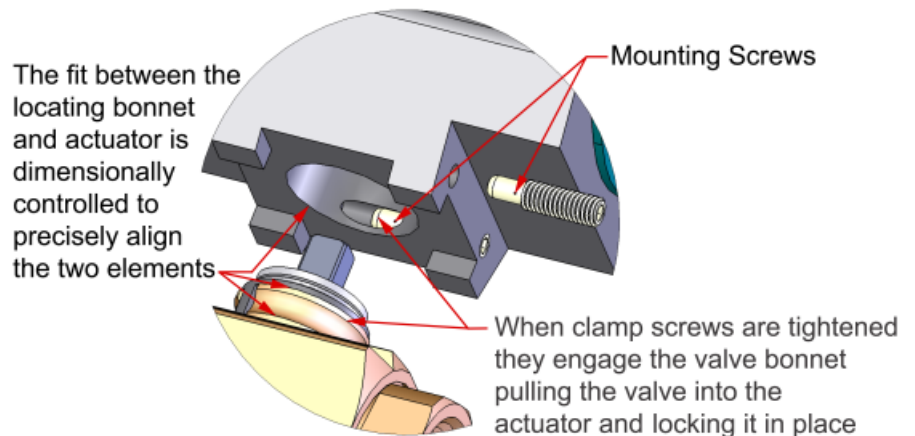

absorbed independent of the clamp screw by means of a four corner mounting pad that straddles a mating projection on the valve body. This locks the

valve in position and eliminates the risk of the valve loosening while in service.

Specifications

Valve

MATERIALS OF CONSTRUCTION

BODY: B16 Brass or CF8M Stainless Steel
BALL: Type 316 Stainless Steel
STEM: Type 630 (17-4) Stainless Steel
SEATS: Glass Reinforced P.T.F.E. (Teflon ®)
SEALS: Viton® Optional: EPR / EPDM


CONNECTION / STYLE SIZES

Pipe / N.P.T.F. 1/4" - 1"
(Dryseal National Pipe Taper)

RATINGS

TEMPERATURE:
P.T.F.E with Viton: -20° F to 350° F
P.T.F.E. with EPR / EPDM: -50° F to 250° F
P.T.F.E. with Buna N: -30°F to 250°F
(also see Pressure Temperature Chart)

PRESSURE:
1,000 p.s.i. C.W.P. (100°F) - Limited Duty
500 p.s.i. C.W.P. - Full Duty
(also see Pressure Temperature Chart)

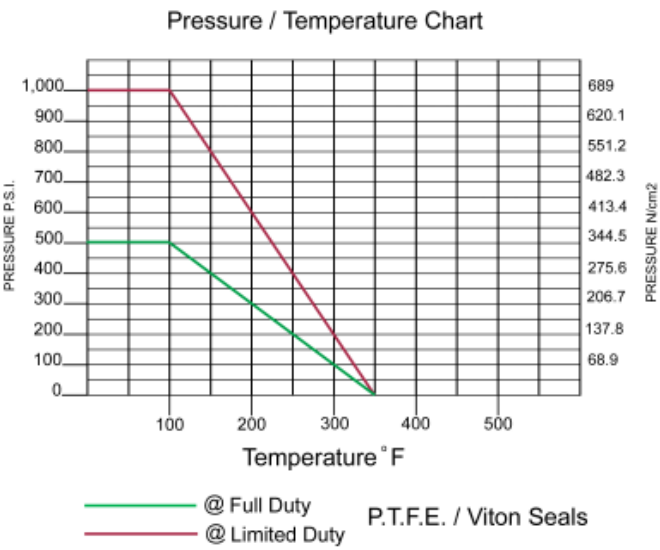

FLOW CHARACTERISTICS

The approximate flow rate through a valve can be calculated as follows:

$$Q = C_v \sqrt{\frac{\Delta P}{G}}$$

where; Q = flow rate in gallons (U.S. Std.) per minute
 Cv = valve constant
 P = pressure drop across the valve in pounds per square inch
 G = specific gravity of the media of relative to water

Note: The values derived from the flow equation are for estimating purposes only. Product variances or systemic factors may alter actual performance.

Size	1/4	3/8	1/2	3/4	1
Cv	5.5	5.5	8	12	32

Specifications

Actuator

MATERIALS OF CONSTRUCTION

Coated Aluminum Die Cast Base, Zytel Enclosure,
300 Series Stainless Steel Output Shaft & Mounting
Hardware

RATINGS

TEMPERATURE: 40°F - 221°F (4°C - 105°C)

DUTY CYCLE: 25%


ENCLOSURE: General Purpose (non-NEMA rated)

Model	Voltage	Index Time* (Seconds)	Current** Start / Running (Amps.)
WD2402	24DC	1.3	2.4 / 1.2
WD1202	12DC	1.3	4.6 / 2.3
* - Approximate Index Time Dependent on Load & Temperature			
** - Current Dependent on Load Requirements (valve size, line pressure & media)			

CONNECTION

Leads, 24" (optional available upon request)

Dimensions

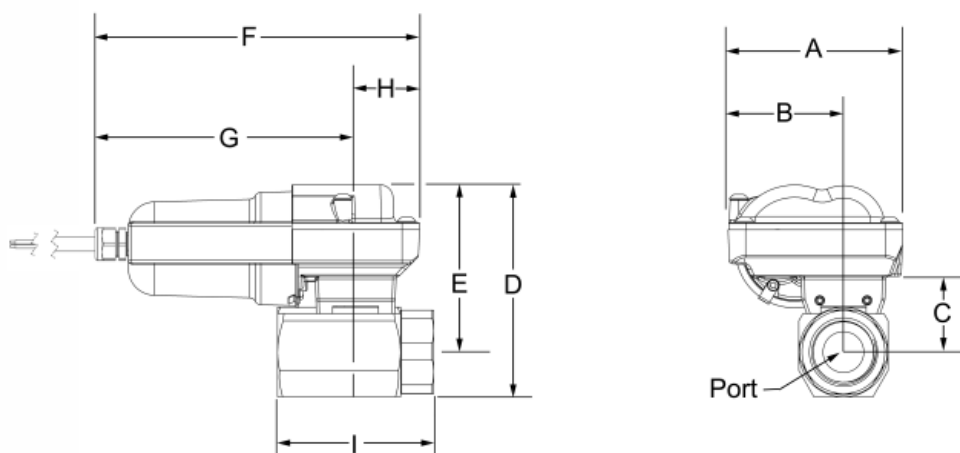

Valve Size	A	B	C	D	E	F	G	H	I	Port
1/4, 3/8, 1/2	3.42	2.26	1.21	3.64	2.99	6.29	5.04	1.25	2.31	.49
3/4			1.34	3.89	3.12				2.53	.62
1			1.48	4.14	3.26				3.06	.80

How To Order

Specify Size and Product Code. Example: **1/2 87-6-RTV-6-WD2402**

Size	Product Code				
	Valve Series	Body Material	Seal Materials	Ball & Stem Material	Operator
1/4	87	1 Brass	RTV Glass Filled Reinforced P.T.F.E. & Viton	6 Stainless Steel	WD2402 24VDC
3/8		6 Stainless Steel	RTR Glass Filled Reinforced P.T.F.E. & EPR		WD1202 12VDC
1/2			RTB Glass Filled Reinforced P.T.F.E. & Buna N		
3/4					
1					

WD2402 Model Available from Stock

WD1202 Manufacture To Order - Minimum Purchase Required

LIMITED WARRANTY - Copy Available Upon Request.

Specifications subject to change without notice and without obligation on the part of the manufacturer.



2 Otter Court
Raymond, NH 03077

Tel. (603) 895-4761
FAX (603) 895-6785
www.geminivalve.com
ISL103-1703



Gemini WDM24DS10X1C4

Position Control Actuator, 0-10 VDC – 90 degree rotation

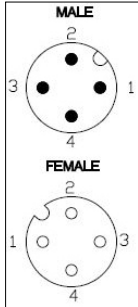


Figure 1: M12 Pinout

Standard actuator is fitted with a M12 A-Coded Male connector.

Note1:

70 Watt supply recommended.

Note2:

Analog voltage must be referenced to ground. Do not apply a negative voltage or greater than 10 VDC to this input.
MAX current Draw: 0.5 mA.

Chart 1: Desired Position vs. Input Voltage

