

Gemini Valve B.V.

Zijperstraat 29, 1823CX Alkmaar
Netherlands
Tel.: +31(0) 161-227.909
Mobile: +316 1358 2578

info@geminivalve.nl
www.geminivalve.nl
GV746



FEATURES

746XS stainless steel 2-way ball-valves are designed for the automatic shut-off of networks of industrial fluids. These 3-piece external tie-bolt ball valves are easy to remove for servicing. This full-bore valve has an anti-static device and double sealing at the cable gland. It is EC- and TA-LUFT-approved. The ISO 5211 mounting pad enables the actuator to be directly assembled.

AVAILABLE MODELS


1/4" to 4" diameters.

Connection	G	SW	BW
stainless steel	746 XS	743 XS	745 XS



LIMITS OF USE

Fluid pressure: PS	64 bar (20°C)
Fluid temperature: WT	- 40°C / +180°C

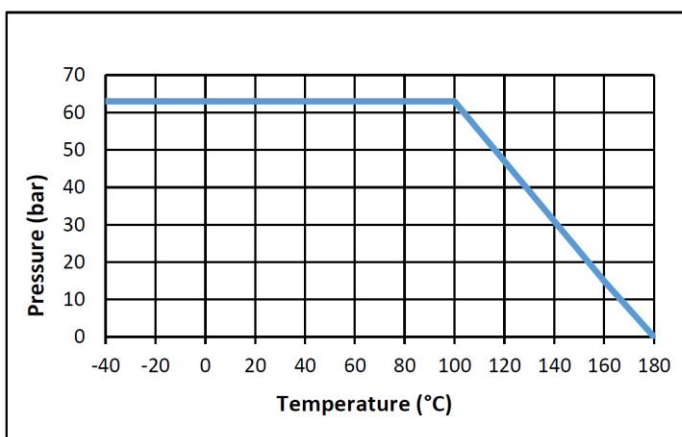

DIRECTIVES AND MANUFACTURING STANDARDS

OBJECT	Standard	ON	OBJECT	Standard
Pressure Equipment Directive 2014/68/EC	<u>1/4" to 1"</u> : not subject		Final test	NKS 12266
	<u>1"1/4 to 4"</u> : category III	TÜV 0035	Material certificate	NKS 10204
Size	EN 12516-1		Motorisation connection	ISO 5211:
Steel grades	EN 1503-1			

Information given as an indication only, and subject to possible modifications.

Information given as an indication only, and subject to possible modifications.